



An intuitive D-MAX operator interface, the OI-TS gives you the easiest direct control and operation of the SE-46C digital line-guide sensor.

For any basic line-guiding application, the OI-TS is an excellent choice. Edge and line guiding on a slitter rewriter, guiding into print, rewinding on a printing press or simple movable sensor center guiding on a blown film extruder, the OI-TS fits the requirement perfectly every time.

Featuring a color touch-screen interface, equipped with color symbols and multiple languages, the OI-TS is easy to install and operate. In addition, the display shows the correct configuration according to the requirements of each application.

This robust and versatile operator interface is designed for easy integration into a control panel or cabinet door. For wall mounting, a frame can be added.



## GENERAL SPECIFICATIONS

### Mounting Options:

Panel (-B) or wall (-W) mount

### Dimensions:

Wall mount:  
128 x 105 x 38 mm  
(5.04 x 4.134 x 1.496 inches)

### Panel mount:

128 x 105 x 33 mm  
(5.04 x 4.134 x 1.30 inches)

### Weight:

600 g (1.32 lbs)  
(OI-TS without mounting accessories)

### Protection Class:

IP64

### Display:

4.3" TFT touch-screen display, 480x272 pixels

### Operating Conditions:

Temperature: 0° to 60° C  
(32° to 140° F)  
Humidity: 10% to 95%, non-condensing

### Connector:

M12 plug- 4-pin

### Connection to D-MAX:


480 mm pigtail cable and compulsory extension cable P/N 717459-0YY (YY length in m, max. length 50 m/164 ft)

## KEY FEATURES

- Symbol-based, easy-to-use interface
- Pre-defined smart keys with full color touch-screen display
- Compact dimensions
- Suitable for wall and panel mounting
- Plug and play
- Easy to read illuminated TFT display
- Compatible with most existing D-MAX systems (Software upgrade may be required)
- Direct operator interface for Fife SE-46C sensor
- Optional mounting bracket: P/N MB-25-M383391, MB-32-M383373

# OI-TS OPERATOR INTERFACE

## KEYS AND DISPLAY

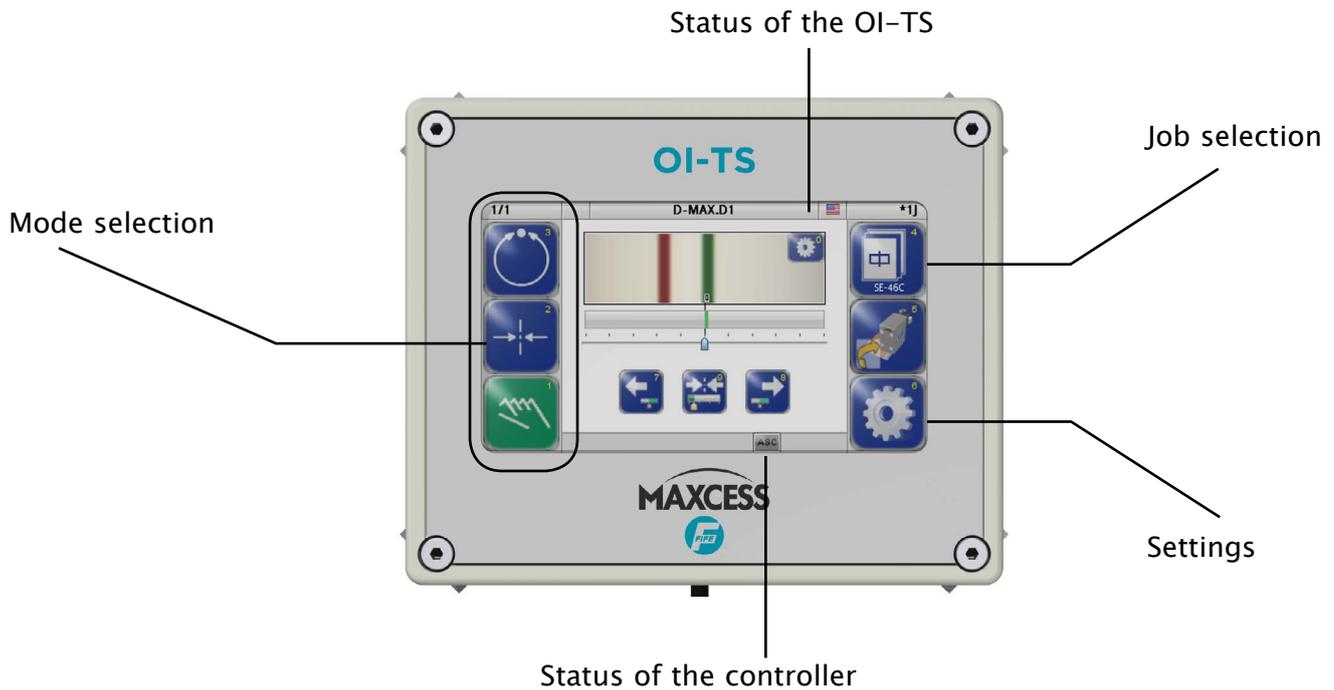

## VERSIONS



### NORTH, CENTRAL AND SOUTH AMERICA

Tel +1.405.755.1600  
Fax +1.405.755.8425  
sales@maxcessintl.com  
www.maxcessintl.com

### INDIA

Tel +91.22.27602633  
Fax +91.22.27602634  
india@maxcessintl.com  
www.maxcess.in

### EUROPE, MIDDLE EAST AND AFRICA

Tel +49.6195.7002.0  
Fax +49.6195.7002.933  
sales@maxcess.eu  
www.maxcess.eu

### JAPAN

Tel +81.43.421.1622  
Fax +81.43.421.2895  
japan@maxcessintl.com  
www.maxcess.jp

### CHINA

Tel +86.756.881.9398  
Fax +86.756.881.9393  
info@maxcessintl.com.cn  
www.maxcessintl.com.cn

### KOREA, TAIWAN AND SE ASIA

Tel +65.9620.3883  
Fax +65.6235.4818  
asia@maxcessintl.com