


























- | NO. REQ'D | | | | | | | | | | | LIST OF MATERIAL | | | | | |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|----------|------------------|--|--------------|--|---------------------|-----|
| 29L213205010 | 29L213205009 | 29L213205008 | 29L213205007 | 29L213205006 | 29L213205005 | 29L213205004 | 29L213205003 | 29L213205002 | 29L213205001 | ITEM NO. | | | | | | QTY |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | 29L201003001 | DS-25 OFFSET PIVOT GUIDE ASSEMBLY | | |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | | 29L202588003 | RACEWAY BASE ASSEMBLY | | |
| - | - | - | - | - | - | - | - | 2 | 2 | - | 3 | | 29L76881003 | ROLLER ASSY, 50.8 [2.00] DIA X 249.9 [9.84] FACE | STANDARD | |
| - | - | - | - | - | - | - | 2 | 2 | - | - | | | 29L76881008 | ROLLER ASSY, 50.8 [2.00] DIA X 249.9 [9.84] FACE | HARD COAT ANODIZE | |
| - | - | - | - | 2 | 2 | - | - | - | - | - | | | 29L76881011 | ROLLER ASSY, 50.8 [2.00] DIA X 249.9 [9.84] FACE | D.E. II PLASMA COAT | |
| - | - | 2 | 2 | - | - | - | - | - | - | - | | | 29L76881018 | ROLLER ASSY, 50.8 [2.00] DIA X 249.9 [9.84] FACE | RUBBER CORK TAPE | |
| 2 | 2 | - | - | - | - | - | - | - | - | - | | | 29L76881022 | ROLLER ASSY, 50.8 [2.00] DIA X 249.9 [9.84] FACE | 11036 PLASMA COAT | |
| 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | | 29L76882001 | STUB SHAFT | | |
| 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 5 | | 29L26704001 | CUP PT SET SCR, M4 X 4mm LG | | |
| 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 6 | | 29L90907002 | SOC HD CAP SCR (LOW HD), M6 X 12mm LG | | |
| 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 7 | | 29L26715004 | SPRING LOCKWASHER, M6 | | |
| 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 8 | | 29L16409001 | FIFE LOGO, 32 [1-1/4] DIA | | |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 9 | | 29L76938001 | WEB DIRECTION LABEL, RIGHT HAND | | |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 10 | | 29L202984001 | OPG NAMEPLATE | | |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 11 | | 29L46833004 | GROUNDING STRAP KIT | | |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 12 | | 29L76938002 | WEB DIRECTION LABEL, LEFT HAND | | |
| 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 13 | | 29L92403051 | WARNING LABEL | | |
| 1 | - | 1 | - | 1 | - | 1 | - | 1 | - | 1 | 14 | | 29L201848006 | ISCT-03 SERVO CENTER KIT W/5M CABLE | | |

LOGO POSITION	1. WRAP STYLE	
	ALL	ALL
	1	
	2	
	3	
	4	
	5	
	6	
	7	
	8	
	9	
	10	
	11	
	12	
	13	
	14	
	15	
	16	

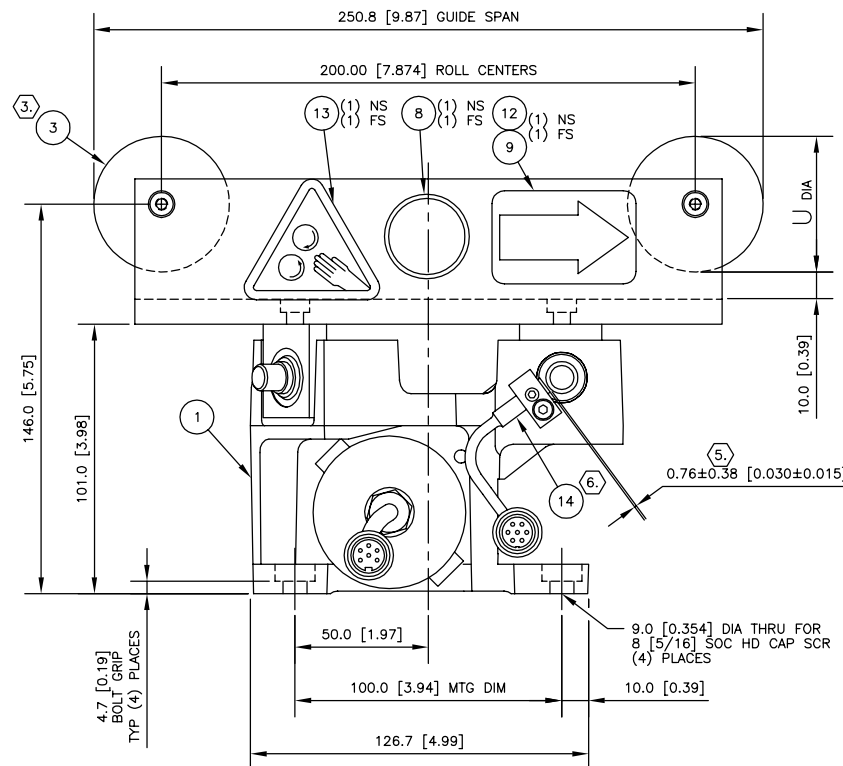

		JMP 02/23/12		WEBEX    WWW.MAXCESSINTL.COM	
		APPROVED JMP 02/23/12			
DRAWING REFERENCE		NUMBER		TITLE	
UNLESS OTHERWISE SPECIFIED GENERAL TOLERANCES: ISO 2768-mS DIMENSIONAL SYMBOLS: ISO 1101 SURFACES: ISO 1302		 THIRD ANGLE PROJECTION DIMENSIONS ARE SHOWN IN DECIMALS UNLESS OTHERWISE NOTED		FIFE D5-25 OFFSET PIVOT GUIDE ASSEMBLY (INSTALLATION) 250.8 [9.87] GUIDE SPAN X 249.9 [9.84] ROLL FACE	
STANDARD SHOP PRACTICES AND STANDARD SHOP TOLERANCES PER DRAWING 201724		DE-BURR ALL EDGES 0.5 (0.020) MAX		LOCATION	SCALE SIZE 3:4 A1
				DRAWING NO. 213205	SHEET NO. REV 1 OF 1 A