
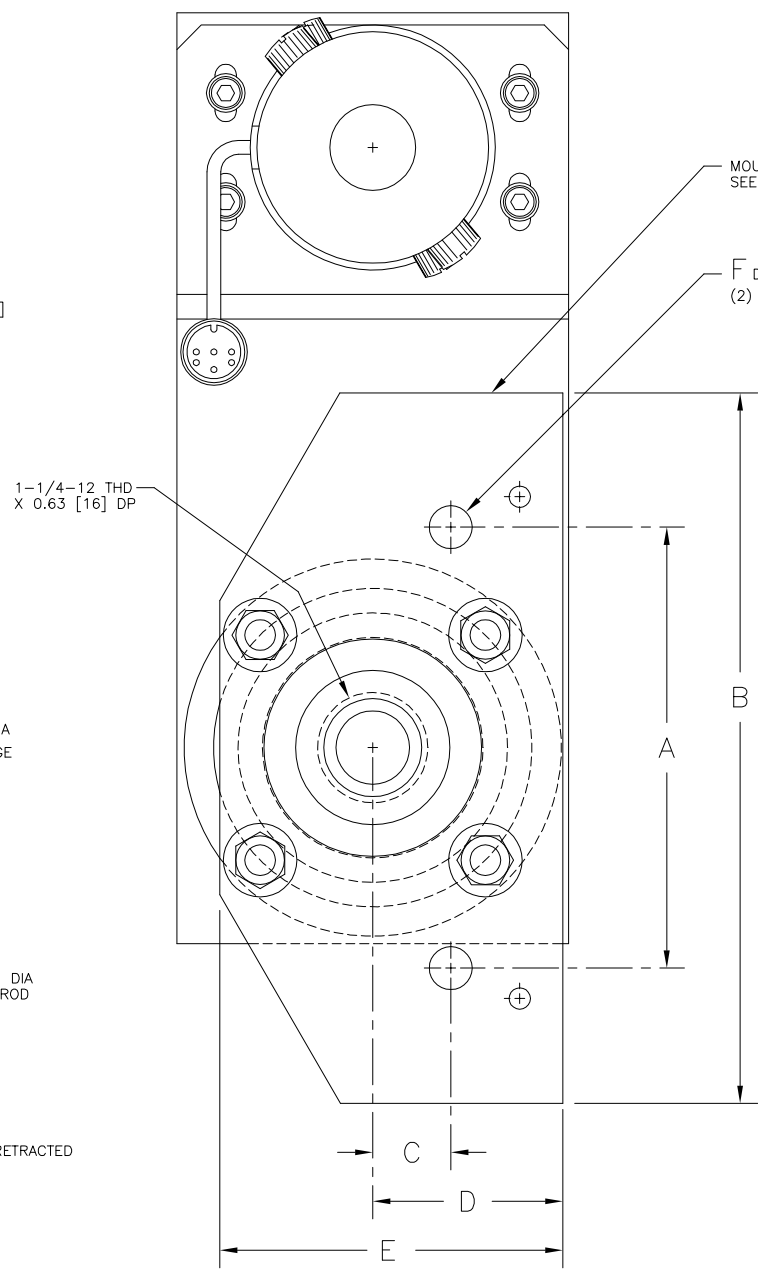


5" STROKE ACTUATOR SHOWN

MOUNTING ADAPTER PART NO.	A	B	C	D	E	F	MOUNTING TYPE
83650-001	4.500 [114]	7.25 [184]	0.796 [20]	1.94 [49]	3-1/2 [89]	0.437 [11]	G
83658-001	5.750 [146]	7.00 [178]	1.000 [25]	2.38 [60]	4 [102]	0.562 [14]	H

- NOTES:
- ALL DIMENSIONS IN BRACKETS [] ARE MILLIMETERS.
 - ACTUATOR W/ STROKE 5.00 [127] OR LESS, DIM 'S' = 9.08 [231].
ACTUATOR W/ STROKE GREATER THAN 5.00 [127], DIM 'S' = STROKE + 4.08 [104].
 - MOUNTING ADAPTERS ARE NOT PART OF THE LAB-10 ACTUATOR ASSEMBLY. THEY MUST BE ORDERED SEPERATELY.
 - MAXIMUN STROKE IS 10.0 INCHES.

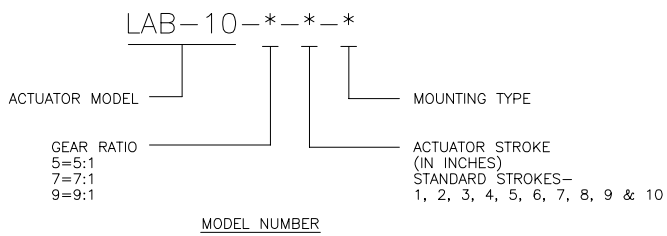

DRAWING REFERENCE		NUMBER	
DE-BURR ALL EDGES 0.020 [0.5] MAX	STANDARD SHOP PRACTICES AND STANDARD SHOP TOLERANCES PER DRAWING 40400		
UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCES: ANSI Y14.5M	This drawing is the property of FIFE CORPORATION. It is loaned with the understanding that it may not be reproduced nor may the information contained herein be used for the making of drawings or for manufacturing purposes without the written consent of FIFE CORPORATION.	
GEOMETRICAL SYMBOLS: ANSI Y14.5M	SURFACES: ANSI Y14.5M		
THIRD ANGLE PROJECTION	SCALE NONE	SIZE D	
DRAWN ET	6/12/97	CHECKED CRC	6/13/97
APPROVED RDF	6/16/97		
TITLE		FIFE INSTALLATION LAB-10 E-M ACTUATOR WITH MOUNTING ADAPTER	
DRAWING NO. 60975		SHEET NO. 1 OF 1	REV C

C	CORRECTED DIM, -7.98 WAS -1.10 ECR #66034	RDF 07/25/05	KF 07/25/05
B	REMOVED 12" STROKE FROM MODEL NUMBER MATRIX. ADDED NOTE #4. ECR #58127	ERH 11/23/99	KF 11/23/99
A	ADDED CHART TO DRAWING. ECR #56152	RWW 11/10/98	CRC 11/10/98
SYM	REVISION	BY DATE	APVD



222 WEST MEMORIAL ROAD (73114-2317)
POST OFFICE BOX 26508
OKLAHOMA CITY, OK 73126-0508, U.S.A.
PHONE: (405) 755-1600 FAX: (405) 755-8425