Reference/Quote _____ Date _____ Phone _____

Customer _____ Email _____

Address _____

WEBEX BOWED ROLLS

REQUIRED PARAMETERS

Bow Type
- ○ Perma
- ○ Adjusta

Web Material
- ○ Paper
- ○ Film/Plastic
- ○ Textile
- ○ Non Woven
- ○ Corrosive
- ○ Other:

Roll Diameter _____

Environment
- ○ Dry
- ○ Damp
- ○ Wet

Application _____

Chemicals _____

Operating Temperature _____

Max Web Width _____

Min Web Width (if multiple webs) _____

Web Speed _____

Web Tension _____

Drive Pulley _____

NOT OFFICIAL DRAWING. ONLY FOR QUOTE PURPOSES. CUSTOMER TO VERIFY AT TIME OF QUOTE/ORDER

SELECT MOUNTING TYPE

○ Pillow Block (Webex Standard)



○ Flange (Outside)



Frame Thickness _____

○ Flange (Inside)



Frame Thickness _____

Units
- ○ Millimeters
- ○ Inches

Distance "A" _____

Distance "B" _____

Wrap Angle on Bowed Roll _____



* "A" should be a minimum of 2X "B". Idler 2 should be as close to the bowed roll as practical to provide desired web correction.

Units
- ○ Millimeters
- ○ Inches

Full Face = Cover Width + 50 mm (2 in)
Working Face = Max Web Width + 50 mm (2 in)

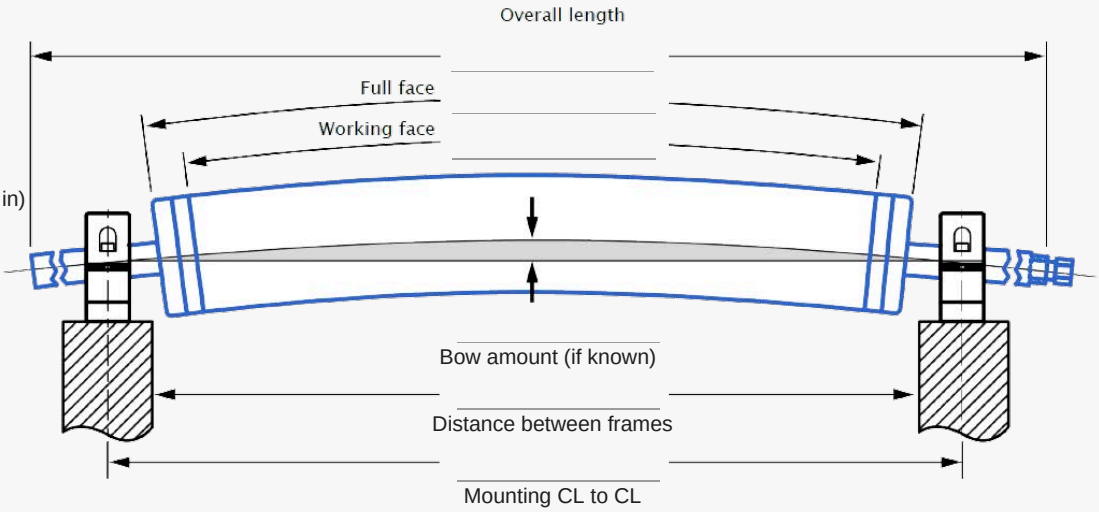

ADDITIONAL COMMENTS