



The entry level D-Max operator interface OI-TS is the easiest way to control the D-MAX processor. The interface also allows for the direct control and operation of the digital line and pattern sensor SE-46C.

The OI-TS fits the requirement of any basic guiding application perfectly, such as edge and line guiding on a slitter rewriter, guiding into print, rewinding on a printing press or simple movable sensor center guiding on a blow film extruder.

The intuitive interface equipped with color symbols combined with short descriptions in different languages makes it easy to install and operate the OI-TS. The display shows the right configuration according to the requirements of each application. The display of the OI-TS is a resistive Color-Touch-Display.

The robust and versatile OI-TS is designed for easy integration into a control panel or cabinet door. For wall mounting, a frame could be added to the OI-TS.

## TECHNICAL SPECIFICATIONS

### Mounting Options:

Panel (-B) or Wall (-W) mount

### Dimensions:

Wall mount:

128x105x38 mm

Panel mount:

128x105x33+5 mm

### Weight:

600g (OI-TS, without mounting accessories)

### Operating Conditions:

Temperature: 0° - 60°C,

Humidity: 10% - 95%, non-condensing

### Display:

TFT Touchscreen-Display, 480x272 Pixel

### Connector

M12 Plug 4-pin

### Protection Class:

IP-64

### Connection to D-MAX:


480mm pigtail cable and compulsory extension cable P/N 717459-0YY (YY Length in m, Max. Length 70m)

## KEY FEATURES

- Symbol-based, easy-to-use interface
- Pre-defined smart keys with full color touch-screen display
- Compact dimensions
- Suitable for Wall- and Panel-Mounting
- Plug and Play
- Easy to read illuminated TFT - Display
- Compatible with all existing D-Max systems (Software upgrade may be required)
- Direct operator interface for Fife SE-46C sensor

# FIFE OI-TS OPERATOR INTERFACE

## KEYS AND DISPLAY

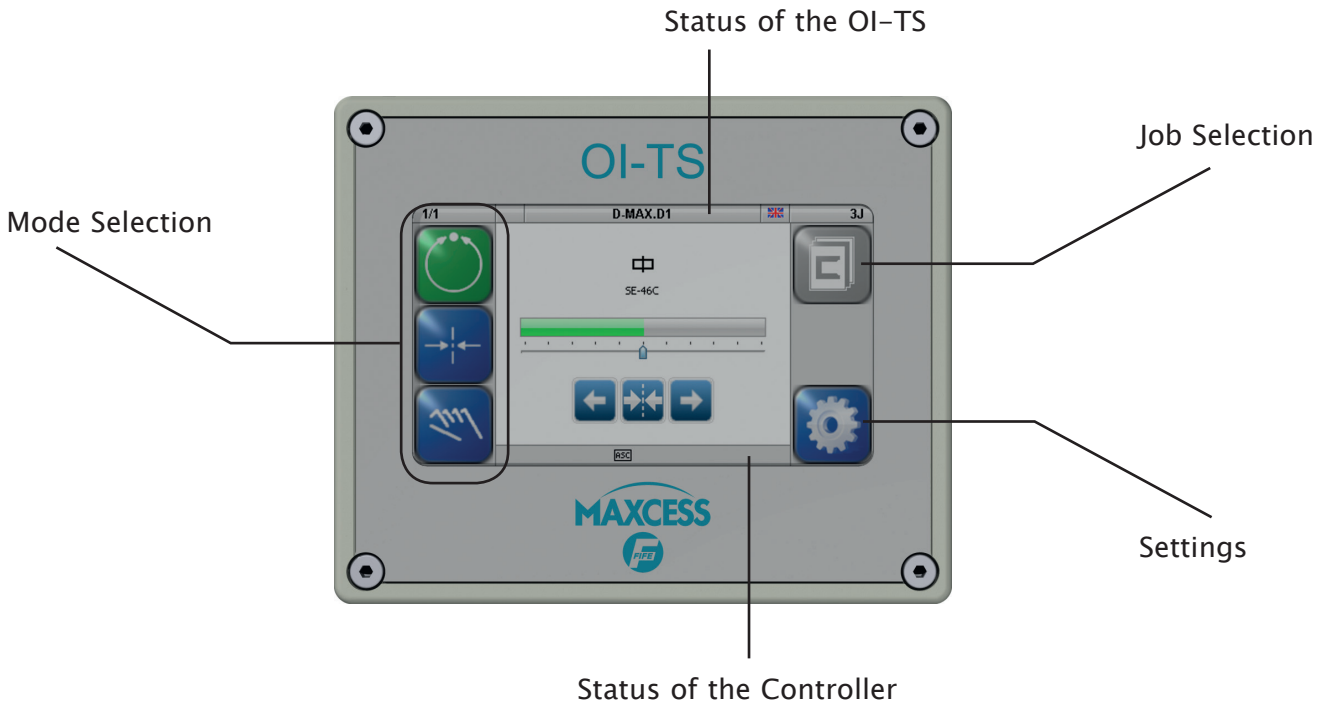

## VERSIONS



Basic version



Version with mounting frame



EUROPE, MIDDLE EAST  
AND AFRICA  
Tel +49.6195.7002.0  
Fax +49.6195.3018  
sales@maxcess.eu  
www.maxcess.eu

NORTH, CENTRAL  
AND SOUTH AMERICA  
Tel +1.405.755.1600  
Fax +1.405.755.8425  
sales@maxcessintl.com  
www.maxcessintl.com

CHINA  
Tel +86.756.881.9398  
Fax +86.756.881.9393  
info@maxcessintl.com.cn  
www.maxcessintl.com.cn

JAPAN  
Tel +81.43.421.1622  
Fax +81.43.421.2895  
japan@maxcessintl.com  
www.maxcess.jp

INDIA  
Tel +91.22.27602633  
Fax +91.22.27602634  
india@maxcessintl.com  
www.maxcess.in

