



A MAXCESS BRAND



Optimal performance meets optimal price

Have better web guide control that's easier to use, with the same level of performance that you've grown accustomed to with Fife. The new DP-20 Plus is simple and easy to operate, with only eight keys, a new backlit screen and the ability to display four lines of text in a package that is flexible and easy to mount. We took all of the features customers loved on the DP-20, the easiest and most intuitive controller we've ever created, and added even more value.

General Specifications

Product Safety Certification
UL/CSA/IEC 61010-1, CE and UKCA

Protection Class
IP54

Ambient Operating Temperature
0 - 50 °C

Power supply
90 VAC - 250 VAC +/- 10 %
50 Hz - 60 Hz

Maximum Power Consumption
180 VA


Actuators
• Electromechanical actuators,
• Hydraulic servo-valve with or without blocking valve or
• ± 10mA output with blocking signal

Sensor Input
2 independent Edge Sensors or
1 Line Sensor


Key Features

- **Bright, backlit display- ideal for dark environments**
- **Easy access auto-setup**
- **User-friendly keypad eliminates confusion**
- **Support for legacy Fives North American sensors**
- **Drives up to a 3.5 A motor for greater applications**
- **RPP protection against feedback voltage to eliminate downtime**
- **100 % backward compatibility with DP-20 and DP-30 and certain CDP-01 applications**
- **Parallel input for easy connectivity to PLC**

DIMENSIONS

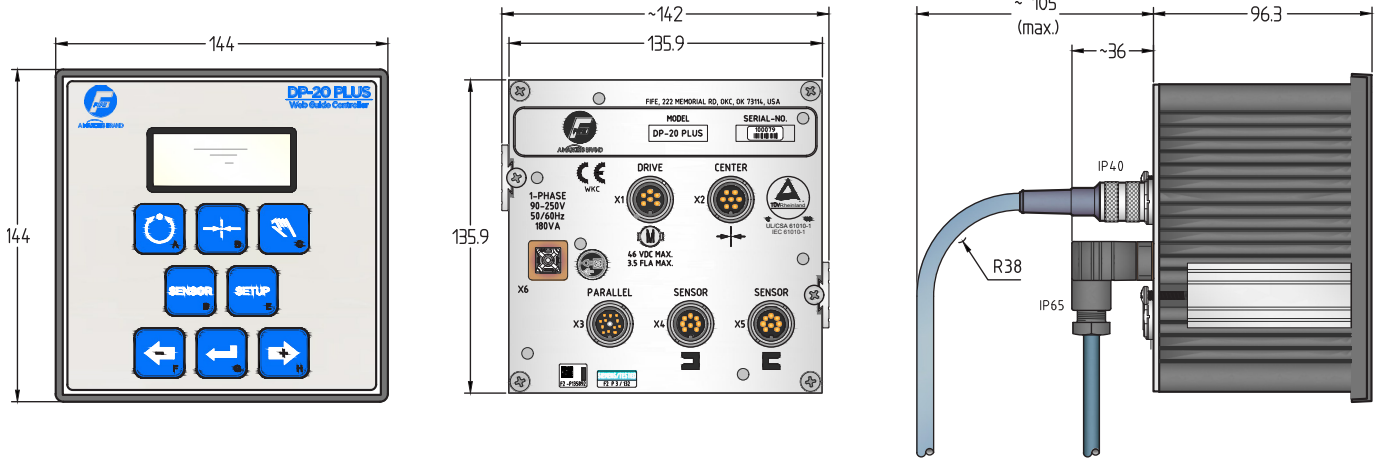

MOUNTING

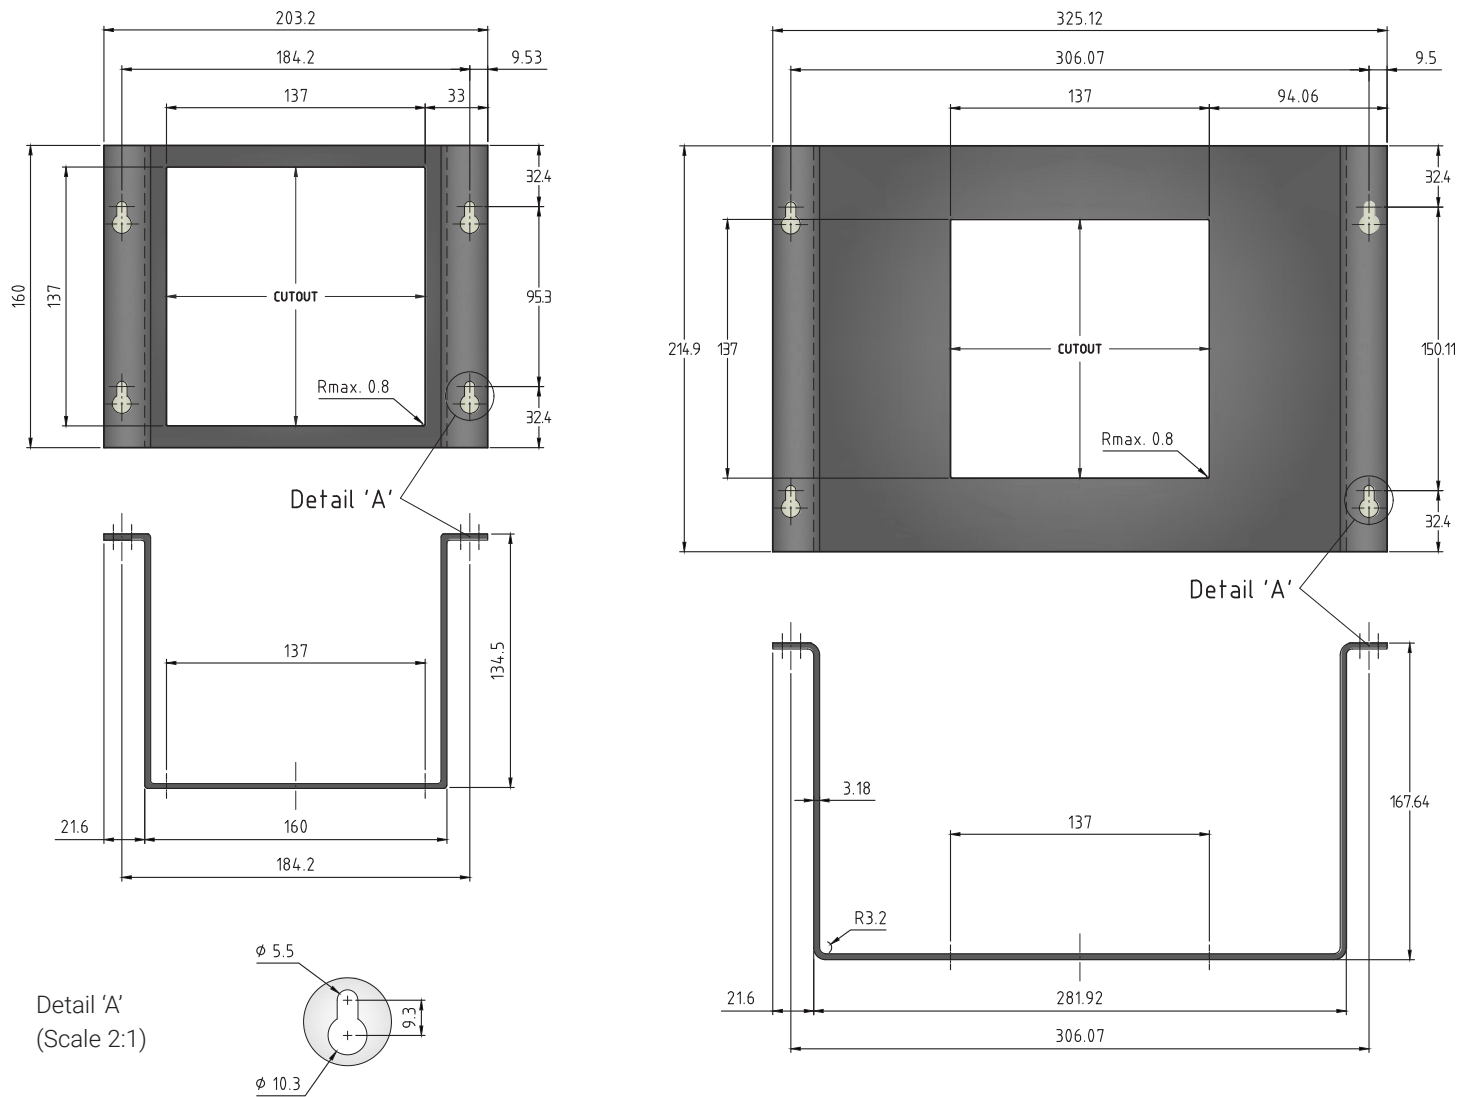

Dimensions in mm

Global HQ & Americas

+1-844-MAXCESS

sales@maxcessintl.com

Maxcess Europe HQ
Fife-Tidland GmbH

+49-6195-7002-0
sales@maxcess.eu

Maxcess Germany
RotoMetrics Deutschland GmbH

+49 6134 7262 - 0
sales@rotometrics.de

Maxcess UK
RotoMetrics Intl. Ltd.

+44 1922 6100 00
uk.sales@maxcessintl.com

Web
maxcess.com

Shop
mymaxcess.eu
myroto.com

