



Introducing the FIFE-500 web guide for narrow and medium web and nonwoven applications. This cost-effective guiding system is easy to use and install, while using new technology to help you improve efficiency. At the heart of the FIFE-500 is a color touch screen that's operator friendly, featuring icons and text in multiple languages to simplify operation and reduce the time necessary for training.



FIFE-500 leverages the latest technology to improve performance and brushless motors to reduce maintenance. Faster core processing speeds mean that the FIFE-500 can adapt quickly to changes in the web, even at high line speeds.

GENERAL SPECIFICATIONS

Web Width

Up to 900 mm (35.4 inches)

Maximum Tension

Sizes 1-4: 355 N (80 lbs)

Sizes 5-7: 1000 N (225 lbs)

Languages

English, German, French, Italian, Spanish, Simplified Chinese, Traditional Chinese, Korean, Portuguese, Japanese, Swedish, Dutch, Turkish, Catalan

Guide Spans

180 mm (7.09 inches) to 600 mm (23.62 inches)

Standard Roller Lengths

160 mm (6.30 inches) to 900 mm (35.40 inches)

Protection Class

IP54

Power Supply

18 - 30 VDC, 108 Watt

Temperature

0-50° C (32 - 122° F)

Product Safety

CE, TuV (IEC 61010-1)



KEY FEATURES

- Brushless motor for reduced maintenance and greater thrust
- Guided Ball Nut adds reliability and long-term performance
- Color touch screen with options for mounting vertically or horizontally
- Multiple languages and icons for easy setup, training and operation
- Cost-effective solution for narrow web and nonwoven applications
- Compact design fits easily in tight spaces
- Optional splice table and fine adjustment mounting bracket

FIFE-500 WEB GUIDING SYSTEM

DIMENSIONS: SIZES 1-4




WITHOUT SPLICE TABLE

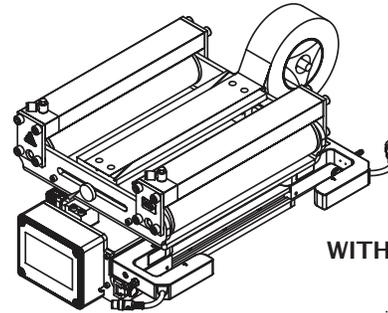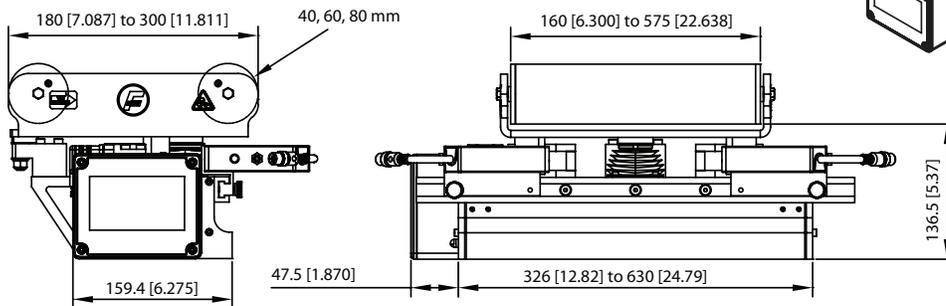

WITH SPLICE TABLE

DIMENSIONS: SIZES 5-7

WITHOUT SPLICE TABLE

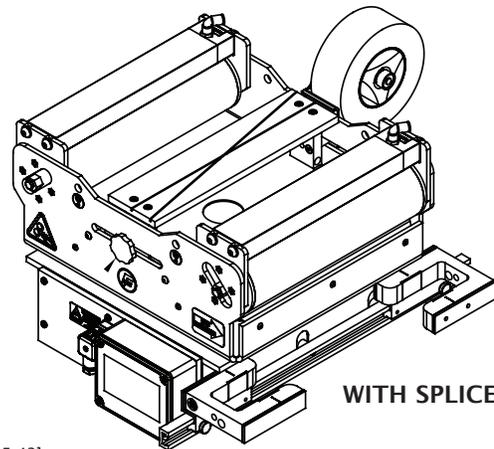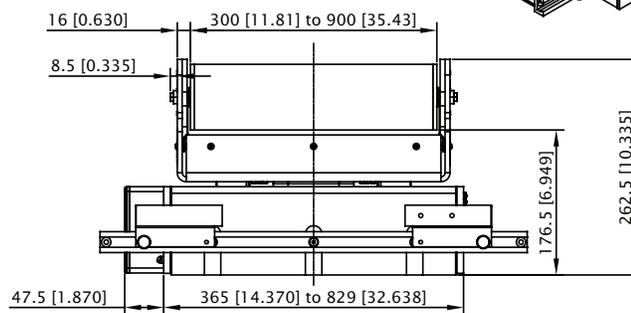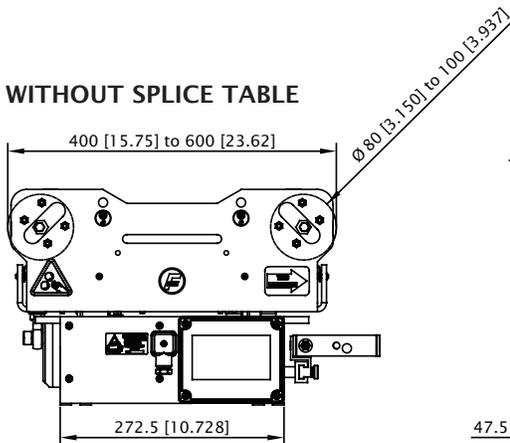

WITH SPLICE TABLE



NORTH, CENTRAL AND SOUTH AMERICA

Tel +1.405.755.1600
Fax +1.405.755.8425
sales@maxcessintl.com
www.maxcessintl.com

INDIA

Tel +91.22.27602633
Fax +91.22.27602634
india@maxcessintl.com
www.maxcess.in

EUROPE, MIDDLE EAST AND AFRICA

Tel +49.6195.7002.0
Fax +49.6195.7002.933
sales@maxcess.eu
www.maxcess.eu

JAPAN

Tel +81.43.421.1622
Fax +81.43.421.2895
japan@maxcessintl.com
www.maxcess.jp

CHINA

Tel +86.756.881.9398
Fax +86.756.881.9393
info@maxcessintl.com.cn
www.maxcessintl.com.cn

KOREA, TAIWAN AND SE ASIA

Tel +65.9620.3883
Fax +65.6235.4818
asia@maxcessintl.com